




## AIR HOSE – 20 BAR

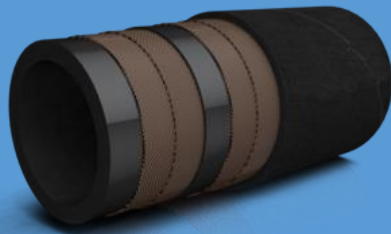

Application: Robust air hose for heavy duty applications in heavy industry, construction and mining.

|                |  |  |  |  |  |  |  |  |
|----------------|--|--|--|--|---|--|--|--|
| Part#          | ID   | OD   | Wall   | Working Pressure   | Burst Pressure  | Bending Radius   | Weight   | Max. Length  |
|                | mm   | mm   | mm   | bar  | bar   | mm   | kg/m   | m  |
| APD060Y-13x5   | 13   | 23   | 5  | 20   | 60  | 104  | 0.40   | 40   |
| APD060Y-19x5   | 19   | 29   | 5  | 20   | 60  | 152  | 0.63   | 61   |
| APD060Y-25x6   | 25   | 37   | 6  | 20   | 60  | 200  | 0.93   | 61   |
| APD060Y-32x6.5 | 32   | 45   | 6,5  | 20   | 60  | 256  | 1.32   | 61   |
| APD060Y-38x7   | 38   | 52   | 7  | 20   | 60  | 304  | 1.51   | 61   |
| APD060Y-51x7   | 51   | 65   | 7  | 20   | 60  | 408  | 2.12   | 61   |
| APD060Y-63x9.5 | 63   | 82   | 9,5  | 20   | 60  | 504  | 2.88   | 61   |
| APD060Y-76x8   | 76   | 92   | 8  | 20   | 60  | 608  | 3.50   | 61   |
| APD060Y-102x11 | 102  | 124  | 11   | 20   | 60  | 816  | 5.30   | 61   |

Standard: EN ISO 2398

### Construction:

Type: Mandrel built

Tube: Blend of synthetic elastomer compound, black, smooth, suitable for water and air, resistant to oil mist.

Reinforcement: High tensile textile cord

Cover: Synthetic elastomer compound, yellow, smooth with cloth impression, weather, ozone and abrasion resistant.

### Temperature Range:

Continuous: -30°C to +85°C

For more information, please contact: TechnoS Multiline LLC, Dubai, UAE

Tel: +971 (4)2237116 / 04-2223670 / 04-2237119 | Fax: +971 (4) 2279959 | Mobile: +971 (50) 6744049

Email: [info@technos-me.com](mailto:info@technos-me.com) / [tecmulti@eim.ae](mailto:tecmulti@eim.ae) Website: [www.technos-me.com](http://www.technos-me.com)