





CEMENT SUCTION & DISCHARGE HOSE

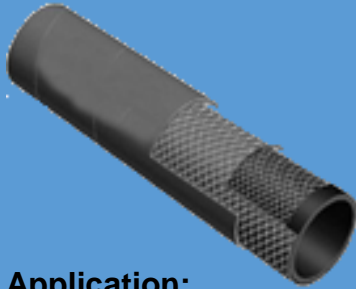

Application:

Abrasion resistant tube and cover fabricated with highest quality elastomer compounds for maximum performance. Used in the transfer of dry materials & slurries and ideal for dry cement, pebble, lime brine, barite and other abrasive media.

					
ID	OD	Working Pressure	Burst Pressure	Weight	Max. Length
mm	mm	bar	bar	kg/m	m
50.8	73.6	20	60	2.94	60
63.1	86.3	20	60	3.54	60
76.2	99.1	20	60	4.11	60
101.6	126.2	20	60	6.21	60
127	153.5	20	60	8.35	30
152.4	183.1	20	60	11.18	30
203	236.9	20	60	16.31	12
254	299.3	20	60	29.81	12
305.1	353.8	20	60	40.18	12

Construction:

Type: Mandrel-built hose.

Finishing: Wrapped surface.

Cover: Black abrasion, weather & ozone resistant synthetic rubber.

Tube: Black abrasion NR/SBR rubber.

Reinforcement: Spiral-plied synthetic fabric with helix wire.

Temperature Range:

Continuous: -35°C to +100°C